

Ultrahigh Light Intensification by a Counter-Propagating Breaking Plasma Wave – Relativistic Flying Parabolic Mirror

Sergei V. Bulanov,^{1,*} Timur Esirkepov,^{1,†} and Toshiki Tajima¹

¹*Kansai Research Establishment, JAERI, Kizu, Kyoto 619-0215, Japan*

(Dated: May, 2003)

A method to generate ultrahigh intense electromagnetic fields is suggested, based on the laser pulse compression, carrier frequency upshift and focusing by a counter-propagating breaking plasma wave, relativistic flying parabolic mirror. This method allows us to achieve the quantum electrodynamics critical field (Schwinger limit) with present day laser systems.

PACS numbers: 12.20.-m, 13.40.-f, 52.27.Ny, 52.38.-r, 52.65.Rr

Keywords: quantum electrodynamics critical field, relativistic plasmas, ultrashort laser pulse, laser-plasma interaction, wakefield, particle-in-cell simulation

The invention of chirped pulse amplification (CPA) method and recent development of laser technology led to a stunning increase of the light intensity in a laser focal spot, [1]. Electrons in laser electromagnetic field become relativistic at intensities $I \sim 10^{18} \text{W/cm}^2$. The ion motion strongly affects the relativistic plasma dynamics starting from $I \gtrsim (m_i/m_e) \times 10^{18} \text{W/cm}^2$ (see Ref. [2] and references therein). Nowadays lasers produce pulses whose intensity is approaching to 10^{22}W/cm^2 [1]. With further increase of intensity we shall meet novel physical processes such as the radiation reaction dominated regimes, which come into play at $I = 10^{23} - 10^{24} \text{W/cm}^2$ [3], and then the regime beyond $I = 10^{25} \text{W/cm}^2$ where the quantum electrodynamics (QED) description is needed as the recoil of emitted photon momentum becomes comparable with the electron momentum [4]. Near the intensity of 10^{29}W/cm^2 , corresponding to the QED critical electric field, light can generate electron-positron pairs from vacuum [5, 6]. Even before that limit, vacuum begins to act nonlinearly such as vacuum polarization. These nonlinear effect have attracted a great deal of attention since [5]: they lie outside the scope of perturbation theory and shed light on the nonlinear quantum electrodynamics properties of the vacuum. There are several ways to achieve such an intensity. One way was demonstrated in the experiments [7], where high-energy bunch of electrons interacts with counterpropagating intense laser pulse. In the reference frame of electrons the electric field magnitude of the incident radiation was approximately 25% of the QED critical field.

A technically feasible way is to increase the power of the contemporary laser system by some 7 orders of magnitude through megajoule lasers [8], albeit quite expensive. Another way is to increase the frequency of the laser radiation and then focus it onto a tiny region. In this method X-ray lasers can be used [9]. To achieve more “moderate” intensities, $10^{24} - 10^{25} \text{W/cm}^2$, another scheme was suggested in Ref. [10], where a quasi-soliton wave between two foils is pumped by the external laser field up to an ultrahigh magnitude. Another method is based on the simultaneous laser frequency upshifting and the pulse compression. These two phenomena were demonstrated in a broad variety of configurations, where they were caused, in general, by different mechanisms. In particular, the wave amplification reflected at the moving relativistic electron slab was discussed in Refs. [11] (based on the frequency up-shift of radiation reflected at the relativistic mirror, as predicted by A. Einstein in Ref. [12]); the backward Thompson scattering at relativistic electron bunch was considered in Refs. [13]; the reflection at the moving ionization fronts has been studied in Refs. [14]; “photon acceleration” schemes with co-propagating laser pulses in underdense plasma were examined in Refs. [15]; various schemes of the counter-propagating laser pulses and the use of parametric amplification process were discussed in Refs. [16].

In the present paper we consider a plasma wakefield in the *wave-breaking regime* as a tool for generating a coherent radiation of ultra-high intensity. Compared to the previously discussed schemes this regime demonstrates both the robustness and coherence of the transformed laser light.

We examine the following scenario. A short intense laser pulse (the “*driver* pulse”) induces wakefield in a plasma. As it is well known [17], the wakefield phase velocity $v_{ph} = \beta_{ph}c$ equals the laser pulse group velocity, which is close to the speed of light in a vacuum when the laser pulse propagates in the underdense plasma. The corresponding Lorentz factor is $\gamma_{ph} = (1 - \beta_{ph}^2)^{-1/2} \approx \omega_d/\omega_{pe}$, where ω_d is the *driver* pulse frequency, ω_{pe} is the Langmuir frequency. The nonlinearity of strong wakefield causes a nonlinear wave profile, including a steepening of the wave and formation of localized maximums in the electron density – the spikes [18]. This amounts to wavebreaking regime (see Ref. [2] and references therein). Theoretically the electron density in the spike tends to infinity, but remains integrable [2]. Sufficiently weak counter-propagating laser pulse (the “*source* pulse”) will be partially reflected from the density

maximum. The reflection coefficient scales as γ_{ph} and the reflected wave vector-potential scales as γ_{ph}^{-3} , as it is shown below. As we see, the electron density maximum acts as a mirror flying with the relativistic velocity $v_{ph} \approx c$. The frequency of the reflected radiation is up-shifted by factor $(1 + \beta_{ph})/(1 - \beta_{ph}) \approx 4\gamma_{ph}^2$, in accordance with the Einstein formula [12]. It is important that the relativistic dependence of the Langmuir frequency on the *driver* pulse amplitude causes parabolic bending of constant phase surface of the plasma wave, since the *driver* pulse has a finite transverse size [19]. As a result, the surface where the electron density is maximal has a shape close to a paraboloid. Because we have a curved mirror, the frequency $\tilde{\omega}_s$ of the reflected radiation depends on the angle:

$$\tilde{\omega}_s = \frac{1 + \beta_{ph}}{1 - \beta_{ph} \cos \theta} \omega_s, \quad (1)$$

where ω_s is the *source* pulse frequency, and θ is the angle between the reflected wave vector and the direction of the driver pulse propagation in the laboratory frame. The curved mirror focuses the reflected light. The focal spot size is of the order of the diffraction limited size. In the reference frame of the wakefield it is $\lambda'_s = \lambda_s((1 - \beta_{ph})/(1 + \beta_{ph}))^{1/2} \approx \lambda_s/2\gamma_{ph}$, where λ_s is the wavelength of the *source* pulse. In the laboratory frame the focal spot size is approximately $\lambda_s/4\gamma_{ph}^2$ along the paraboloid axis, and $\approx \lambda_s/2\gamma_{ph}$ in the transverse direction. In the focal spot the resulting intensity gain factor scales with γ_{ph} as $\gamma_{ph}^{-3} \times (\tilde{\omega}_s/\omega_s)^2 \times (D_s/\lambda'_s)^2 = 64(D_s/\lambda_s)^2\gamma_{ph}^3$, where D_s is the diameter of the efficiently reflected portion of the *source* pulse beam. This value can be great enough to substantially increase the intensity of the reflected light in the focus, even up to the QED critical electric field.

In order to calculate the reflection coefficient, we consider the interaction of an electromagnetic wave with a maximum of the electron density formed in a breaking Langmuir wave. In the laboratory frame, this interaction can be described by the wave equation

$$\partial_{tt}A_z - c^2\Delta A_z + \frac{4\pi e^2 n(x - v_{ph}t)}{m_e \gamma_e} A_z = 0, \quad (2)$$

where A_z is the z -component of the vector potential, γ_e is the electron Lorentz factor, and $\gamma_e \approx \gamma_{ph}$ near the maximum of the density in the wakewave wavebreaking regime.

According to the continuity equation $\partial_t n_e + \text{div}(n_e v_e) = 0$, the electron density in the stationary Langmuir wave is given by $n = n_0 v_{ph}/(v_{ph} - v_e)$, where the electron velocity v_e varies from $-v_{ph}$ to v_{ph} (see Ref. [18]), and the electron density varies from the minimal value $= n_0/2$ to infinity (integrable). For the breaking plasma wakewave, in every wave period approximately a half of electrons are located in the spike of the electron density. Therefore we can approximate the electron density by $n(x - v_{ph}t) = (1 + \lambda_p \delta(x - v_{ph}t))n_0/2$, where λ_p is the wakefield wavelength and $\delta(x)$ is the Dirac delta function. This approximation is valid when the density maximum thickness is sufficiently less than the collisionless skin depth c/ω_{pe} and *source* pulse wavelength in the wakefield rest frame, i. e. when the wakefield is close to the wave-breaking regime.

In the reference frame comoving with the plasma wakewave, Eq. (2) has the same form. The Lorentz transformation to this frame is given by $t' = (t - v_{ph}x/c^2)\gamma_{ph}$, $x' = (x - v_{ph}t)\gamma_{ph}$, $y' = y$, $z' = z$.

We seek for solution to Eq. (2) in the form $A_z = \mathcal{A}(x') \exp(i(\omega'_s t' + k'_x x' + k'_y y' + k'_z z'))$, where $\omega'_s = (\omega_s + v_{ph}k_x)\gamma_{ph}$, $k'_x = (k_x + v_{ph}\omega/c^2)\gamma_{ph}$, $k'_\perp = k_\perp$ are the frequency and wavevector in the moving frame, and $k'_x > 0$. Using this ansatz, from Eq. (2) in the moving frame we obtain

$$\frac{d^2 \mathcal{A}}{dx'^2} + q^2 \mathcal{A} = \chi \delta(x') \mathcal{A}, \quad (3)$$

where $q^2 = \omega'^2_s/c^2 - k'^2_\perp - \omega_{pe}^2/(2c^2\gamma_{ph}) > 0$ and $\chi = \omega_{pe}^2 \lambda_p/c^2$. This equation is equivalent to the scattering problem at the delta potential. The solution is $\mathcal{A}(x') = \exp(iqx') + \rho(q) \exp(-iqx')$ for $x' \geq 0$ (incident and reflected wave), and $\mathcal{A}(x') = \tau(q) \exp(iqx')$ for $x' < 0$ (transmitted wave), where $\rho(q) = -\chi/(\chi + 2iq)$ and $\tau(q) = iq/(\chi + 2iq)$. In a nonlinear Langmuir wave, its wavelength depends on the wave amplitude [18], and for the breaking wakewave we have $\lambda_p \approx 4(2\gamma_{ph})^{1/2}c/\omega_{pe}$. In this case $\chi = 4(2\gamma_{ph})^{1/2}\omega_{pe}/c$. Taking $\omega'^2_s = 4\gamma_{ph}^2\omega_s^2$ into account, we find that the reflection coefficient, defined as a ratio of the reflected to the incident energy flux, in the co-moving frame is $\approx (\omega_d/\omega_s)^2/2\gamma_{ph}^3$. In the laboratory frame it is

$$R \approx 8\gamma_{ph} (\omega_d/\omega_s)^2. \quad (4)$$

The intensity $\tilde{I}_{sf}$ in the focal spot of the *source* pulse, reflected and focused by the electron density maximum in the laboratory frame, is increased by the factor of the order of

$$\tilde{I}_{sf}/I_s \approx 32(\omega_d/\omega_s)^2(D_s/\lambda_s)^2\gamma_{ph}^3. \quad (5)$$

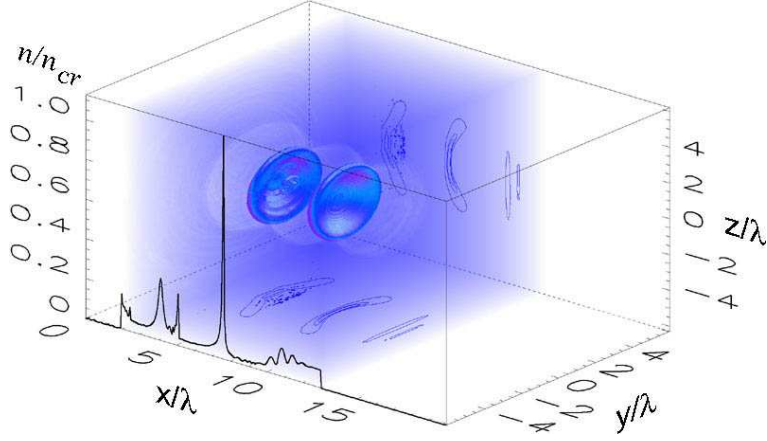


FIG. 1: The electron density in the wake of the *driver* laser pulse at $t = 14 \times 2\pi/\omega_d$. The $(x, y = -6\lambda, z)$ -plane: density profile along the symmetry axis. Blue curves for density values $n = 0.12, 0.24, 0.36n_{cr}$ on the corresponding perpendicular planes of symmetry. Isosurfaces for value $n = 0.15n_{cr}$, “blue gas” for lower values.

Theoretically, the actual gain can be even greater, because a) the estimation (4) corresponds to one-dimensional case, whereas the density modulation in the 3D breaking wakewave is stronger, b) the reflectance (4) of the 3D paraboloidal mirror is greater at the periphery.

We consider the following example. A one-micron laser pulse (*driver*) generates wakefield in a plasma with density $n_e = 10^{17}\text{cm}^{-3}$. The corresponding plasma wavelength is $\lambda_p \approx 100\mu\text{m}$. The Lorentz factor, associated with the phase velocity of the wakefield, is estimated as $\gamma_{ph} \approx \omega_d/\omega_{pe} \approx 100$. The counter-propagating one-micron laser pulse with intensity $I_s = 10^{17}\text{W/cm}^2$ (*source*) is partially reflected and focused by the wakefield cusp. If the efficiently reflected beam diameter is $D_s = 200\mu\text{m}$, then, according to Eq. (5), the final intensity in the focal spot is $\tilde{I}_{sf} \approx 1.5 \times 10^{29}\text{W/cm}^2$. The *driver* pulse intensity should be sufficiently high and its beam diameter should be enough to give such a wide mirror, assume $I_d = 10^{18}\text{W/cm}^2$ and $D_d = 800\mu\text{m}$. Thus, if both the *driver* and *source* are one-wavelength pulses, they carry 17J and 0.1J, respectively. We see that in an optimistic scenario the QED critical electric field may be achieved with the present-day laser technology!

To demonstrate the feasibility of the effect of the light reflection and focusing by the breaking wakewave, we performed three-dimensional particle-in-cell (PIC) simulations using the code REMP (Relativistic Electro-Magnetic Particle-mesh code) based on scheme [20]. In the simulations the *driver* pulse propagates in the direction of the x -axis. Its dimensionless amplitude is $a_d = 1.7$ which corresponds to peak intensity $4 \times 10^{18}\text{W/cm}^2 \times (1\mu\text{m}/\lambda_d)^2$, where λ_d is the *driver* wavelength. The *driver* is linearly polarized along the z -axis, it has the gaussian shape, its FWHM size is $3\lambda_d \times 6\lambda_d \times 6\lambda_d$. The *source* pulse propagates in the opposite direction. Its wavelength is two times greater than the *driver* wavelength, $\lambda_s = 2\lambda_d$. The *source* pulse amplitude is chosen to be small, $a_s = 0.05$, to reduce the distortion of the wakewave. The pulse shape is rectangular in the x -direction and Gaussian in the transverse direction, its size is $6\lambda_d \times 6\lambda_d \times 6\lambda_d$. To distinguish the electromagnetic radiation of the *driver* from the *source* pulses, we set the *source* pulse to be linearly polarized in the direction perpendicular to the *driver* polarization, i. e. along the y -axis. The laser pulses propagate in the underdense plasma slab with the electron density $n_e = 0.09n_{cr}$, which corresponds to the Langmuir frequency $\omega_{pe} = 0.3\omega_d$. The plasma slab is localized at $2\lambda_d < x < 13\lambda_d$ in the simulation box with size $22\lambda_d \times 19.5\lambda_d \times 19.2\lambda_d$. The simulations were carried out on 720 processors of the supercomputer HP Alpha Server SC ES40 at JAERI Kansai. The mesh size is $dx = \lambda_d/100$, total number of quasiparticles is 10^{10} (ten billion). The boundary conditions are absorbing on the x -axis and periodic in the transverse direction, both for the electromagnetic fields and quasi-particles. We emphasize that the simulation grid must be and in fact was chosen to be fine enough to resolve the huge frequency up-shift given by Eq.(1), exhausting all the supercomputer resources.

The simulation results are presented in Figs. 1 and 2. Fig. 1 shows the plasma wakewave induced by the *driver* laser pulse as modulations in the electron density. We see the electron density cusps in the form of paraboloids. They move with velocity $v_{ph} \approx 0.87c$, the corresponding gamma-factor is $\gamma_{ph} \approx 2$. Their transverse size is much larger than the wavelength of the counterpropagating *source* pulse in the reference frame of the wakefield. As seen from the electron density profile along the axis of the *driver* pulse propagation, the wakewave dynamics is close to wave-breaking regime. Each electron density maximum forms a semi-transparent parabolic mirror, which reflects a part of the *source* pulse radiation.

In Fig. 2 we present the electric field components. The *driver* pulse is seen in the cross-section of the z -component

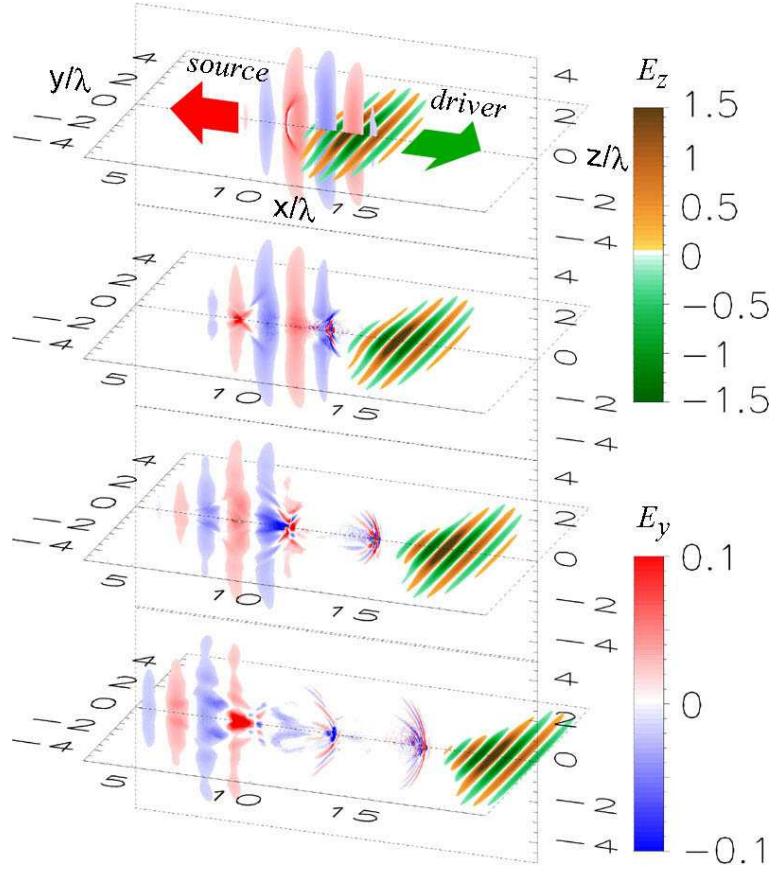


FIG. 2: The cross-sections of the electric field components. The $(x, y, z = 0)$ -plane: $E_z(x, y, z = 0)$ (green-brown colorscale), the plane $(x, y = 0, z)$: $E_y(x, y = 0, z)$ (blue-red colorscale) at $t = 16, 18, 20, 22 \times 2\pi/\omega_d$ (top-down).

of the electric field in the $(x, y, z = 0)$ -plane. The *source* pulse and its reflection is seen in the cross-section of the y -component of the electric field in the $(x, y = 0, z)$ -plane. The part of the *source* pulse radiation is reflected from the flying paraboloidal mirrors, then it focuses yielding the peak intensity in the focal spot, and finally it defocuses and propagates as a spherical short wave train, whose frequency depend on the wave vector direction, in agreement with Eq.(1). This process is clearly seen in the animations produced from the data (see authors' website). The main part of the reflected light power is concentrated within the angle $\sim 1/\gamma_{ph}$, hence this coherent high-frequency beam resembles a searchlight. The reflected part has the same number of cycles as the *source* pulse, as expected, since it is Lorentz invariant. The wavelength and duration of the reflected pulse are approximately 14 times less than the wavelength and duration of the *source* pulse, in agreement with Eq.(1) since $(1 + \beta_{ph})/(1 - \beta_{ph}) \approx 14.4$. The focal spot size of the reflected radiation is much smaller than the wavelength of the *source* pulse. The electric field in the focal spot is approximately 16 times higher than in the *source* pulse. Therefore, the intensity increases 256 times in agreement with estimation (5).

We emphasize that the efficient reflection is achievable only when the wakefield is close to the wave-breaking regime and the cusps in the electron density are formed. As we see in the simulations, the reflection and focusing is robust and even distorted (to some extent) wakewave can efficiently reflect and focus the *source* pulse radiation. We also observe that despite the moderate reflection coefficient, the colossal frequency up-shift and focusing by a sufficiently wide (transversely) wakewave give us a huge increase of the light intensity.

Similar processes may occur in laser-plasma interaction spontaneously, e.g. when a short laser pulse exciting plasma wakewave is a subject of the stimulated backward Raman scattering or a portion of the pulse is reflected back from the plasma inhomogeneity. Then the backward scattered electromagnetic wave interacts with plasma density modulations in the wakewave moving with relativistic velocity. According to scenario described above, the electromagnetic radiation, reflected by the wakewave, propagates in the forward direction as a high-frequency strongly collimated (within the angle $\sim 1/\gamma_{ph}$) electromagnetic beam.

We have proposed the scheme of the relativistic plasma wake caustic light intensification, which can be achieved

due to the reflection and focusing of light from the maximum of the electron density in the plasma wakewave at close to the wave-breaking regime. The presented results of 3D PIC simulations provide us a proof of principle of the electromagnetic field intensification during reflection of the laser radiation at the flying paraboloidal relativistic mirrors in the plasma wakewave. With the ideal realization of the described scheme we can achieve extremely high electric fields (in the laboratory reference frame) approaching the QED critical field with the present-day laser technology. We envision the present example is just one manifestation of what we foresee as the emergence of *relativistic engineering*.

We appreciate the help of APRC computer group. We thank V. N. Bayer, M. Borghesi, J. Koga, K. Mima, G. Mourou, N. B. Narozhny, K. Nishihara, V. S. Popov, A. Ringwald, V. I. Ritus, V. I. Telnov, and M. Yamagiwa for discussion.



* Also at General Physics Institute RAS, Vavilov str. 38, Moscow 119991, Russia

† Also at Moscow Institute of Physics and Technology, Institutskij per. 9, Dolgoprudny Moscow region 141700, Russia; Electronic address: timur@apr.jaeri.go.jp

- [1] G. A. Mourou, C. P. J. Barty, and M. D. Perry, Phys. Today **51**, No. 1, 22 (1998).
- [2] S. V. Bulanov, et. al. in: Reviews of Plasma Physics. Vol. 22, ed. by V.D. Shafranov (Kluwer Academic / Plenum Publishers, NY, 2001), p. 227.
- [3] A. Zhidkov, et al., Phys. Rev. Lett. **88**, 185002 (2002).
- [4] S. V. Bulanov, T. Zh. Esirkepov, J. Koga, and T. Tajima, in preparation.
- [5] W. Heisenberg and H. Z. Euler, Z. Phys. **98**, 714 (1936); J. Schwinger, Phys. Rev. **82**, 664 (1951).
- [6] E. Brezin and C. Itzykson, Phys. Rev. D **2**, 1191 (1970); N. B. Narozhny and A. I. Nikishov, Sov. Phys. JETP **38**, 427 (1974); V. S. Popov, JETP **94**, 1057 (2002).
- [7] C. Bula, et al., Phys. Rev. Lett. **76**, 3116-3119 (1996).
- [8] T. Tajima and G. Mourou, Phys. Rev. ST Accel. Beams **5**, 031301 (2002).
- [9] A. Ringwald, Phys. Lett. B **510**, 107 (2001); R. Alkofer, et al., Phys. Rev Lett. **87**, 193902 (2001); T. Tajima, Plasma Phys. Rep. **29**, 207 (2003).
- [10] B. Shen and M. Y. Yu, Phys. Rev. Lett. **89**, 275004 (2002).
- [11] K. Landecker, Phys. Rev. **86**, 852 (1952); L. A. Ostrovskii, Soviet Physics Uspekhi **116**, 315 (1976).
- [12] A. Einstein, Ann. Physik **17**, 891 (1905).
- [13] F. R. Arutyunian and V. A. Tumanian, Phys. Lett. **4**, 176 (1963); Y. Li, et. al., Phys. Rev. ST Accel. Beams **5**, 044701 (2002).
- [14] V. I. Semenova, Sov. Radiophys. Quantum Electron. **10**, 599 (1967); W. B. Mori, Phys. Rev. A **44**, 5118 (1991); R. L. Savage, Jr., et al., Phys. Rev. Lett. **68**, 946 (1992).
- [15] S. C. Wilks, et al., Phys. Rev. Lett. **62**, 2600 (1989); C. W. Siders, et al., Phys. Rev. Lett. **76**, 3570 (1996); Z.-M. Sheng, et al., Phys. Rev. E **62**, 7258 (2000).
- [16] G. Shvets, et. al., Phys. Rev. Lett. **81**, 4879 (1998); Y. Ping, et. al., Phys. Rev. E **62**, R4532 (2000); P. Zhang, et al., Phys. Plasmas **10**, 2093 (2003); N. J. Fisch and V. M. Malkin, Phys. Plasmas **10**, 2056 (2003).
- [17] T. Tajima and J. Dawson, Phys. Rev. Lett. **43**, 262 (1979).
- [18] A. I. Akhiezer and R. V. Polovin, Sov Phys. JETP **30**, 915 (1956).
- [19] S. V. Bulanov and A. S. Sakharov, JETP Lett., **54**, 203 (1991).
- [20] T. Zh. Esirkepov, Comput. Phys. Comm. **135**, 144 (2001).